




art. TENSYON-EVO

Supporto a quattro vie (A = Max 25 mm, B = Max 36 mm, C = Max 40 mm)

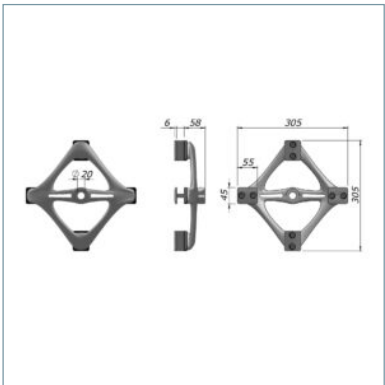

specifiche tecniche / technical data

spess. max 25 mm/thickness max 25 mm	spess. max 36 mm/thickness max 36 mm	spess. max 40 mm/thickness max 40 mm	altre spessori / other thickness
V-TENSYON-EVO-A	V-TENSYON-EVO-B	V-TENSYON-EVO-C	a richiesta / on demand